


小-24

地 点		名 称						
24	C-4	尼崎市産業郷土館						
所 在 地		建 物 構 造						
尼崎市								
水準点	測定年度	44年度	杭	設計	構造	至(m)	長さ(m)	支持力(t/本)
	標高番号							
	所在地			実施				
	O.P.(m)							
G. L. (m)		O. P. ±						

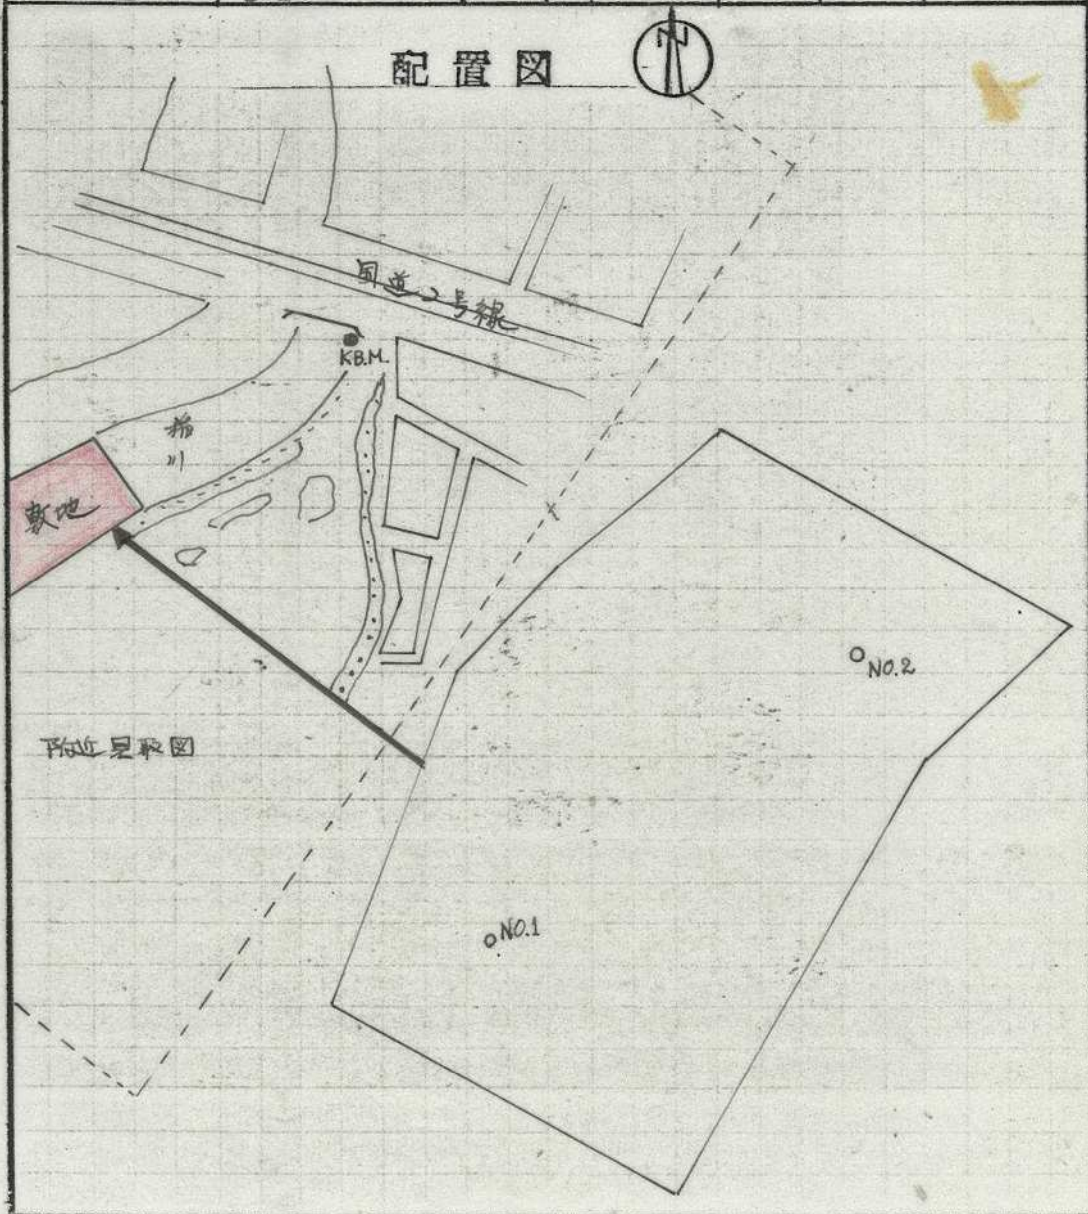

土 質 柱 試 験			
試験地点	No. 1	孔内水深(m)	G.L. - 1.70
土質記号	O.P.土	土質記号	B.M. @ 1.810

層 号 (m)	深 度 (m)	土 質 記 号	土 質 名	色 調	相 對 密 度 D _{rel}	備 考	N 値 30cm	標準貫入試験 N 値						層 号 (m)	深 度 (m)	土 質 記 号	土 質 名	色 調	相 對 密 度 D _{rel}	備 考	N 値 30cm	標準貫入試験 N 値					
								10	20	30	40	50	60									10	20	30	40	50	60
1				暗灰		単層砂混入 上部砂層に砂を注入 0.70"の砂を注入 砂の注入量は約	1/30							21	20.60	0.90	粗砂	暗灰	Dense	砂の注入量は約	3/30						
2	1.90	1.90	粘土	暗灰	Very loose		1/30							22					Soft		4/30						
3	2.80	0.90	砂	暗灰	Very loose	粗砂層に砂を注入 含水量約10%	1/30							23						22.50" P.T. 土 3.0" 管砂工 目録片が混入 含水量約10%	3/30						
4						粗砂、砂層に砂を注入 含水量約10%	3/30							24							3/30						
5	4.90	2.10	粘土	暗灰	Loose	下部砂層に砂を注入	1/30							25						目録片が混入 砂層に砂を注入 含水量約10%	3/30						
6						中粗砂、下部砂層に砂を注入	1/30							26							3/30						
7	6.80	1.90	砂		Medium	砂層に砂を注入	1/30							27							3/30						
8						砂層に砂を注入 含水量約10%	3/30							28					Soft		4/30						
9	8.60	1.80	シルト		Very Soft	粘土層に砂を注入 含水量約10%	3/30							29					Medium		5/30						
10							3/40							30							5/30						
11							3/41							31							5/30						
12						目録片が混入 含水量約10%	3/31							32							5/30						
13							3/30							33							5/30						
14							3/33							34							5/30						
15							3/33							35	25.20	1.60	粘土	暗灰	Medium		5/30						
16	16.00	7.40	粘土	暗灰	Very Soft		3/37							36						砂層に砂を注入、含水量約10%	1/30						
17						上部砂層に砂を注入 含水量約10%	2/30							37	26.40	1.20	粗砂	暗灰	Stiff	砂層に砂を注入、含水量約10%	1/30						
18						粗砂、砂層に砂を注入 含水量約10%	2/37							38	27.80	1.40	シルト	暗灰	Very Stiff	砂層に砂を注入	2/30						
19							2/34							39					Very		2/30						
20	19.70	3.70	砂	暗灰	Dense		2/30							40	29.40	1.70	粗砂	暗灰	Dense	砂層に砂を注入、含水量約10%	2/30						

土質調査結果				
調査地点	No	2	孔内水位(m)	G.L. - 1.20
B.M (m)	O.P 土		G.L. (m)	B.M 1.035

標準 R (m)	標準 高 (m)	標準 深 (m)	標準 厚 (m)	土質 記号	土質 名	色 調	相対 密度 N ₆₀	観 察	標準貫入試験 N 値						標準 R (m)	標準 高 (m)	標準 深 (m)	標準 厚 (m)	土質 記号	土質 名	色 調	相対 密度 N ₆₀	観 察	標準貫入試験 N 値					
									10	20	30	40	50	60										10	20	30	40	50	60
1	2.145	1.20	1.20		粘土	暗緑	Very Loose	真砂の盛土である	2/30						21									3/36					
2								7. 木片混入	1/44						22									3/32					
3	1.445	2.50	1.30		泥炭土	暗緑	Very Soft	最良の土	2/47						23						Soft		貝の片、要母片混入 粘着力強い	3/32					
4								上部に泥炭土と砂が 混入する	3/30						24									3/30					
5								砂は粗砂で細砂が5% 位混入	3/30						25									3/34					
6	1.445	5.50	3.00		砂		Loose	下部に泥炭土と砂が 混入する	3/30						26								貝の片、要母片混入 貝の片 少量に混入する	3/30					
7								要母片混入 粗砂の混入	3/39						27									3/30					
8	1.445	7.70	2.20		シルト		Very Soft	下部に泥炭土と砂が 混入する	3/33						28									3/30					
9								上部にシルトが混入 粗砂の混入	3/31						29									3/30					
10									3/39						30									3/32					
11								要母片混入	3/38						31									3/30					
12								貝の片混入	3/34						32									3/34					
13	1.445								3/39						33									3/30					
14								粗砂の混入が所々あり	3/40						34	32.645	23.70	14.60		粘土	暗緑	Medium		3/30					
15	1.3365	15.00	7.30		粘土	暗緑	Very Soft		3/36						35	32.365	24.90	1.10		シルト		Stiff		上部に粘土と砂が 粗砂の混入が所々あり	3/30				
16								砂は粗砂 Vt 50% 主	3/30						36									3/30					
17								Vt 50~20% 最大 Vt 200% 位	3/39						37	32.365	26.60	1.80		砂		Dense		下部に泥炭土と砂が 混入する	3/33				
18	1.3365	1.10						17.30~17.90 間 粗砂の混入	3/34						38								砂は粗砂 Vt 50% 主 Vt 10~20%	3/37					
19	1.3365	19.10	4.10		砂	暗緑	Very Dense		3/38						39	32.765	28.20	2.20		砂		Loose		最大 Vt 200% 位	3/35				
20								上部に泥炭土と砂が 混入する	3/31						40	32.365	40.30	1.30		砂	暗緑	Very Dense		砂は粗砂 上部に泥炭土と砂が 混入する	3/36				