


地 点		名 称							
24	C-4	尼崎市産業郷土館							
所 在 地		建 物 構 造							
尼崎市									
水準点	測定年度	44年度	杭	設計	構造	至(m)	長さ(m)	支持力(t/本)	
	標高番号			実施					
	所在地								
	O.P(m)								
G.L(m)		O.P ±							

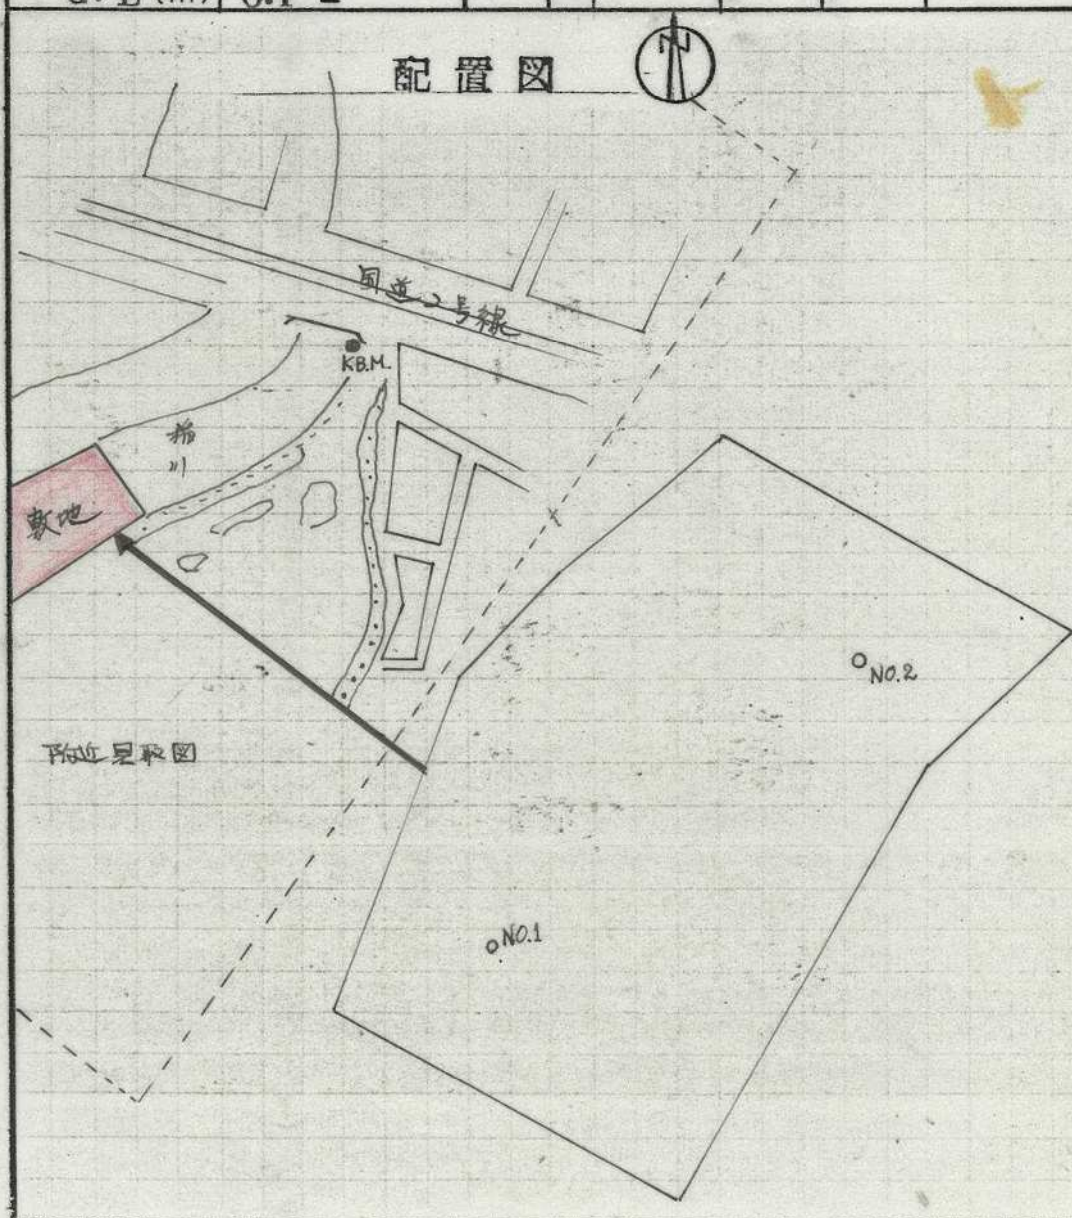

土質柱状図			
調査地点	No. 1	孔内水圧計	G.L. - 1.70
地質記号	0.2土	Q.L. (m)	B.M. @ 1.810

層 号 (m)	深 度 (m)	土 質 記 号	土 質 名	色 調	相 対 密 度 D _{rel}	観 察	N 値 30cm	標準貫入試験N値						層 号 (m)	深 度 (m)	土 質 記 号	土 質 名	色 調	相 対 密 度 D _{rel}	観 察	N 値 30cm	標準貫入試験N値					
								10	20	30	40	50	60									10	20	30	40	50	60
1				暗灰		黄褐色粘土 上部粘土層に 0.70"の鉄管が埋入 下部粘土層に	1/30							21	20.60	0.90	粗砂	暗灰	Dense	黄褐色粘土層に 鉄管が埋入	3/30						
2	1.90	1.90	粘土	暗灰	Very loose	粗砂層に埋入 鉄管が埋入	1/30							22					Soft		4/30						
3	2.80	0.90	砂	暗灰	Very loose	粗砂層に埋入 鉄管が埋入	1/30							23						22.50"の鉄管が埋入 鉄管が埋入	5/30						
4						粗砂層に埋入 鉄管が埋入	1/30							24							3/30						
5	4.90	2.10	粘土	暗灰	Loose	下部粘土層に埋入	1/30							25						黄褐色粘土層に 鉄管が埋入	3/30						
6						中部粘土層に埋入	1/30							26							3/30						
7	6.80	1.90	砂		Medium	鉄管が埋入	1/30							27							3/30						
8						粗砂層に埋入 鉄管が埋入	3/30							28					Soft		4/30						
9	8.60	1.80	シルト		Very soft	粘土層に埋入 鉄管が埋入	3/30							29					Medium		5/30						
10							3/40							30							5/30						
11							3/41							31							5/30						
12						鉄管が埋入 鉄管が埋入	3/31							32							5/30						
13							3/30							33							5/30						
14							3/33							34							5/30						
15							3/33							35	25.20	14.60	粘土	暗灰	Medium		5/30						
16	16.00	7.40	粘土	暗灰	Very soft		3/37							36						砂が埋入。鉄管が埋入	11/30						
17						上部粘土層に埋入 鉄管が埋入	28/30							37	26.40	1.20	粘土	暗灰	Stiff	鉄管が埋入	17/30						
18						鉄管が埋入 鉄管が埋入	28/37							38	37.80	1.40	シルト	暗灰	Very stiff	砂が埋入	25/30						
19							28/34							39					Very		28/39						
20	19.70	3.70	砂	暗灰	Dense		28/30							40	29.40	1.70	粗砂	暗灰	Dense	鉄管が埋入	28/30						

土質調査結果				
調査地点	No. 2	孔内水位	G.L. - 1.20	
B.M. (m)	O.P. 土	G.L. (m)	B.M. 1.035	

標準 R (m)	標準 高 (m)	標準 深 (m)	標準 厚 (m)	土質 記号	土質 名	色 調	相対 密度 N ₆₀	観察	標準貫入試験 N 値						標準 R (m)	標準 高 (m)	標準 深 (m)	標準 厚 (m)	土質 記号	土質 名	色 調	相対 密度 N ₆₀	観察	標準貫入試験 N 値					
									10	20	30	40	50	60										10	20	30	40	50	60
1	2.145	1.20	1.20		粘土	暗緑	Very Loose	真砂の盛土である	2/30						21									2/36					
2								上層に木片混入	1/4						22									2/32					
3	1.445	2.50	1.30		泥炭土	暗緑	Very Soft	最良の土	2/47						23						Soft		貝殻片、要母片混入 粘着力強い	2/32					
4								上部に泥炭土と砂 混入する	2/30						24									2/30					
5								砂は粗砂で細砂が5% 位混入	2/30						25									2/34					
6	1.445	5.50	3.00		砂		Loose	下部に泥炭土と砂 混入する	2/30						26								貝殻片、要母片混入 貝殻片 少量に混入する	2/30					
7								要母片混入 粗砂の混入	2/39						27									2/30					
8	1.445	7.70	2.20		シルト		Very Soft	下部にシルトと砂混入 上部にシルトが混入	2/33						28									2/30					
9								粗砂の混入	2/31						29									2/30					
10									2/39						30									2/32					
11								要母片混入	2/38						31									2/30					
12								貝殻片混入	2/34						32									2/34					
13	1.445								2/39						33									2/30					
14								粗砂の混入が所々ある	2/40						34	32.645	23.70	14.60		粘土	暗緑	Medium		2/30					
15	1.365	15.00	7.30		粘土	暗緑	Very Soft	上部に粘土と砂混入 粗砂の混入が所々あり	2/36						35	32.365	24.90	1.10		シルト		Soft		2/30					
16								砂は粗砂 Vt 50% 主	2/30						36									2/30					
17								Vt 50~20% 最大 Vt 200% 位	2/39						37	35.365	26.60	1.80		砂		Dense		2/33					
18	1.365	1.10						17.30~17.90 間 粗砂の混入	2/34						38									2/17					
19	1.365	19.10	4.10		砂	暗緑	Very Dense	最大 Vt 200% 位	2/18						39	37.765	28.20	2.20		砂	暗緑	Loose		2/15					
20								上部に Vt 混入する	2/31						40	38.165	40.30	1.30		砂	暗緑	Very Dense		2/26					